


- Tolerances  
5%, 3%, 1%, .5%, .25%, .1%, .05%
- Resistance Range  
.001Ω to 7.5KΩ
- Temperature Coefficient  
.1Ω to <1Ω ± 90 PPM/C°  
.05Ω to <.1Ω ± 100 - 150 PPM/C°  
-55° C to +275° C
- Temperature Range  
1000 VRMS
- Dielectric Strength  
Tinned Copperweld
- Leads  
Mil-R-26, Characteristic U
- Meet or exceeds  
1 & 2 Watt
- Wattage Ratings

Dimension	Size (In.)	Tolerance
A	.475	±.010
B	.115	±.010
C	.080	±.010
D	24 ga.	-
E	1.5	min.

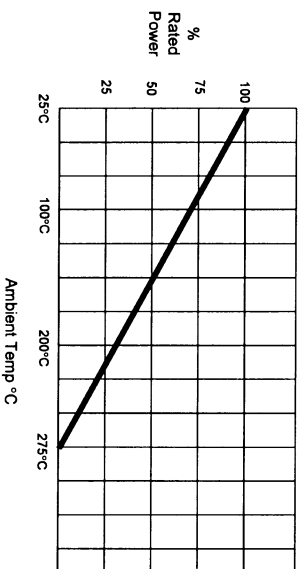

# PACIFIC RESISTOR CO.

## Component Data Sheet

**SERIES 15A4T - AXIAL  
4 TERMINAL RESISTOR  
1 & 2 WATT - HIGH STABILITY**