


- Tolerances 5%, 3%, 1%, .5%, .25%, .1%, .05%, .02%
- Resistance Range .001Ω to 25KΩ
- Temperature Coefficient .1Ω to <1Ω ± 90 PPM/C°
.05Ω to <1Ω ± 100 - 150 PPM/C°
-55° C to +275° C
- Temperature Range 1000 VRMS
- Dielectric Strength Tinned Copperweld
- Leads Mil-R-26, Characteristic U
- Meet or exceeds 3 Watts
- Wattage Ratings

Dimension	Size (In.)	Tolerance
A	.600	±.020
B	.190	±.015
C	.125	±.010
D	20 ga.	-
E	1	min.

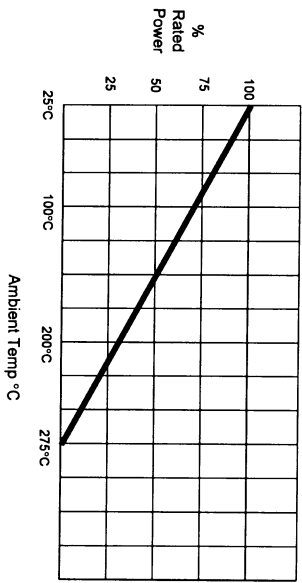

PACIFIC RESISTOR CO.

Component Data Sheet

**SERIES N1A4T - AXIAL
4 TERMINAL RESISTOR
3 WATTS-HIGH STABILITY**