


- Tolerances
5%, 3%, 1%, .5%, .25%, .1%, .05%, .02%
- Resistance Range
.001Ω to 200KΩ
- Temperature Coefficient
10Ω and above ± 20 PPM/C°
1Ω to <10Ω ± 50 PPM/C°
.1Ω to <.1Ω ± 90 PPM/C°
.05Ω to <.1Ω ± 100 - 150 PPM/C°
- Special Temp. Coefficients
Available
- Temperature Range
-55° C to +275° C
- Dielectric Strength
1000 VRMS
- Leads
Tinned Copperweld
- Meet or exceeds
Mil-R-26, Characteristic U
- Wattage Ratings
10 Watt

Dimension	Size (In.)	Tolerance
A	1.680	±.062
B	.350	±.031
C	.100	±.031
D	18 ga.	-
E	1.5	min.

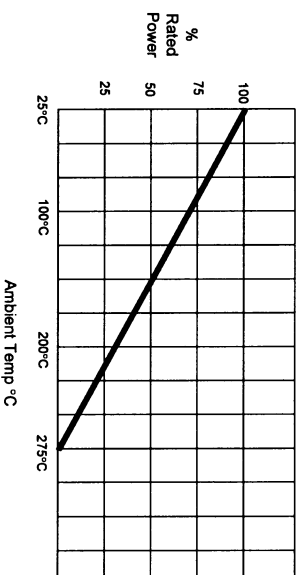

PACIFIC RESISTOR CO.

Component Data Sheet

**SERIES 10A4T - AXIAL
4 TERMINAL RESISTOR
10 WATT - HIGH STABILITY**