


- Tolerances 5%, 3%, 1%, .5%, .25%, .1%, .05%
- Resistance Range .001Ω to 50KΩ
- Temperature Coefficient .1Ω to $1\Omega \pm 90 \text{ PPM/C}^\circ$
.05Ω to $1\Omega \pm 100 - 150 \text{ PPM/C}^\circ$
- Temperature Range -55° C to +275° C
- Dielectric Strength 1000 VRMS
- Leads Tinned Copperweld
- Meet or exceeds Mil-R-26, Characteristic U
- Wattage Ratings 5 Watt

Dimension	Size (In.)	Tolerance
A	.960	±.010
B	.312	±.010
C	.200	±.010
D	18 ga.	-
E	1.5	min.

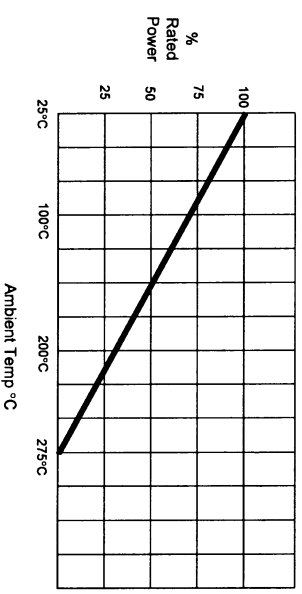

PACIFIC RESISTOR CO.

Component Data Sheet

**SERIES 5A4T - AXIAL
4 TERMINAL RESISTOR
5 WATT - HIGH STABILITY**